

# Walker Advantages

### **Front-Mount Deck**

Achieving a beautiful cut has been our focus from the very first Walker Mower design. Positioning the mowing deck in front of the machine is fundamental to producing high-quality results. The front-mount deck of the Walker reduces impact on the turf prior to cutting, resulting in a more consistent, carpet-like finish. This result is achieved by transferring weight from the deck caster tires which minimizes matting of the grass.

The Walker's flexible deck suspension provides smooth, consistent cutting as the front mounted deck articulates independently of the tractor following ground contour, minimizing scalping, and providing a beautiful cut.

The Walker torsion-flex carrier frame allows the deck to freely articulate and flex laterally, producing a smooth cut, even over complicated ground contours. This makes Walker Mowers ideal for mowing uneven turf.

### **Short Deck Coupling**

Front-mount decks also create a shorter distance between the contact point of the drive tire and the contact point of the front caster tire, allowing Walker decks to precisely follow ground contours. Compared to mid-mount hanging decks used on other mowers, Walker mowing decks scalp less and leave less uncut grass in the valleys of ground contours.

# Scalp less grass on the crest












Deck articulates over uneven terrain

Cut more grass in the valley









# **Interchangeable Decks and Add-ons**

Whether handling grass, leaves, debris, or snow, Walker Mowers are designed for year-round productivity. On most models, decks can easily be switched for larger or smaller collection, mulching, or discharge decks to suit the task at hand. Plus with dozens of add-ons, such as a dethatcher, dozer blades, snowblowers, and enclosed cabs, the Walker is one of the most versatile mowers on the market.

# **Tilt-Open Bodies and Tilt-Up Decks**

Each Walker features a tilt-open body, quickly exposing the drive belts, electrical system, engine, and drivetrain, making service and maintenance easy. No special tools or equipment are needed. Simply release the body latch, and the gas spring assisted enclosure opens up for unobstructed access to all of the Walker's working components.

All Walker decks quickly tilt up, making maintenance tasks safe and easy. It takes seconds to unlock, lift, and secure the deck in an up position, providing access to the blades, housing, and chute. H models also have an optional Power Tilt-Up® deck lift. Walker tilt-up decks also minimize wasted space when storing the Walker Mower.




# Walker Advantages

# Grass Handling System® (GHS)

Walker invented the internal Grass Handling System® on its first mower, and it remains the most efficient way to vacuum grass clippings, leaves, and debris from the lawn.

Collection decks move clippings to a center, rear discharge chute where an internal blower vacuums grass clippings and debris, and then blows it directly into a compact, rear-mounted grass catcher box. The PowerFil® oscillating chute evenly packs clippings, and the Grass-Pak® full signal alerts the operator when it is time to empty the catcher. To dump clippings, the operator simply lifts the catcher with the side handles, or utilizes the optional Power Dump or Hi-Dump® add-ons from the operator seat.

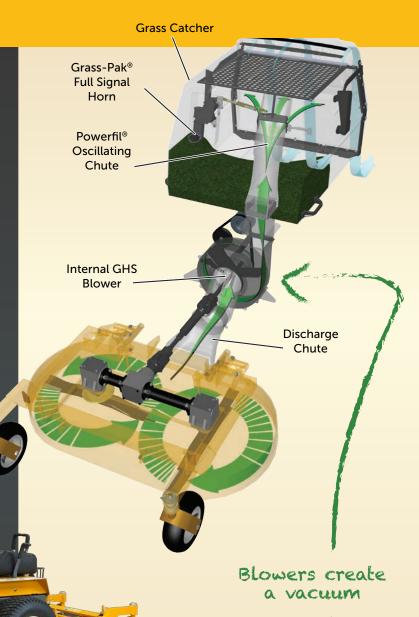

# Pictured: S18 with optional Power Dump

# **Integrated Components**

Walker Mowers are engineered to ensure the entire grass collection system is internal. This intentional effort has allowed Walker Mowers to retain their compact footprint. There are no bulky tubes or bags extending beyond the footprint of the mower. By positioning the GHS blower internally, a powerful vacuum action is achieved, leaving a carpet-like appearance to your lawn in spring, summer, and fall.



Internal GHS 10.5" (26.67 cm) Blower (Models C19, C19i, T, D)



Internal GHS 12.75" (32.38 cm) Blower (Model S)



Internal GHS 13.25" (33.66 cm) Blower (Model C23i)







Walker T27i with 52" deck footprint: 53" (134.62 cm) W 95" (241.30 cm) L Versus a Z Master with 52" deck footprint: 68" (172.72 cm) W 102" (259.08 cm) L

# **Precision Steering and Handling**

With an operator-friendly combination of finger-tip steering and the Forward Speed Control, the Walker Mower goes precisely where you want it to with little effort.

### **Forward Speed Control**

Once in the drive position, the Forward Speed Control uses a friction lock to work as a cruise control, allowing you to control the mower by simply applying pulling pressure on the steering levers. To stop, pull the Forward Speed Control back to the Neutral-Park position.

### **Steering Levers**

Walker Mower steering levers take control the moment pressure is applied. Each steering lever is spring-dampened, providing smooth machine operation. You can easily steer the machine by controlling both levers with a single hand, only using gentle fingertip pressure. The steering system is designed for precision steering and handling, using optimal linkage geometry and high-quality components.

### **Compact**

Most lawns have areas with low hanging branches, narrow gates, or other obstacles that are difficult to mow. The compact size of the Walker Mower gives you the ability to mow challenging properties easily and efficiently.

The Walker Mower has a small footprint designed to get into and out of tight places like gates, between beds and trees, fence corners, and other similar landscape features.



# Walker Advantages

# Transmission Oil Performance System (TOPS)™

TOPS<sup>TM</sup> brings enhanced drivetrain protection and performance to all Walker Mowers equipped with Eaton Model 7 hydrostatic transmissions by actively circulating and filtering the transmission system fluid every 38 seconds.


### **TOPS™** includes:

- A fully-machined, billet aluminum oil pump with integrated filter mount, driven by transmission drive belt and circulates filtered oil when engine is running
- An oil filter with premium fiberglass media made in the USA for Walker
- Remote steel oil reservoir which increases oil capacity by 100% and reduces oil temperature
- Fully-synthetic oil formulated specifically for extended transmission life under high loads and in extreme ambient temperatures
- ISO-VG 220 viscosity oil for superior protection and performance
- A maintenance schedule that adds 500-hour oil and filter change interval after the initial 100-hour break-in service
- Extended transmission warranty when serviced as directed, conditions apply



See more details at: walker.com/tops



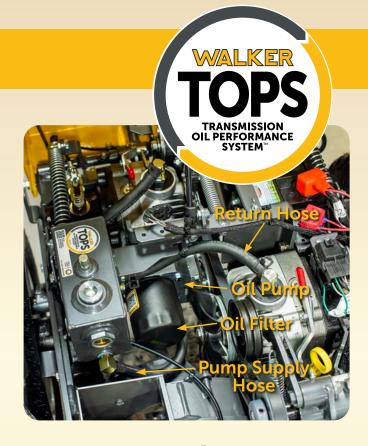

TOPSTM =
Longer Transmission life
AND
Extended Transmission
Warranty







Standard oil and filter in Kohler engines from Walker



Kohler PRO 300-hour, extended-life synthetic oil and filter provides unmatched protection for Walker Mowers equipped with Kohler engines. This 10W-50 fully synthetic oil has a 3x longer life, extending oil changes while providing ideal engine protection in all seasons and all temperatures.

- 3X longer oil change interval
- Engineered by Amsoil exclusively for Kohler
- Fully-synthetic oil formulated specifically for extended oil change intervals in Kohler air-cooled engines
- Guaranteed 300-hour oil change interval on most KOHLER® gas engines past, present, and future
- 10W-50 viscosity for all season performance
- Extra corrosion inhibitor for seasonal storage and multi-season use
- Lower oil consumption than conventional oil
- Warranty approved for KOHLER engines

See more details at: walker.com/kohler-engine-oil





# Kohler PRO Synthetic 10W-50 --vs-- Conventional Auto Engine Oil (API-SN)

|  | Kohler PRO Synthetic 10W-50 | Conv. Auto Oil (API-SN) |
|--|-----------------------------|-------------------------|
| Guaranteed 300-hour oil change interval                              | <b>✓</b>                    | ×                       |
| Extra corrosion protection for seasonal storage                      | <b>✓</b>                    | ×                       |
| Multi-season operation   | <b>✓</b>                    | ×                       |
| Superior performance for extreme cold and hot operation temperatures | <b>✓</b>                    | ×                       |
| Lower oil consumption  | <b>✓</b>                    | ×                       |

# Model S

The Model S is the quintessential Walker Mower. Inspired by the original 1977 prototype, the Model S is simple and easy to operate, and very efficient at mowing residential properties. With Walker's Grass Handling System®, a patented Blower Shaft PTO® design, and reduced weight and cost, the Model S is the perfect entrylevel mower for experiencing Walker's signature beautiful cut and zero-turn productivity.

Entry-level collection mower, ideal for smaller properties



# Model \$18

- 18 HP Briggs and Stratton Vanguard engine
- Commercial rated compact V-Twin with pressure oil lubrication
- 7.4 MPH (11.9 km/h) ground speed
- 4 gallon (15.1 liter) fuel tank
- Deck/Kit options: Collection 36"-48" (91 cm-122 cm), Mulching 36"-48" (91 cm-122 cm),
   Discharge 36"-56" (91 cm-142 cm)



Dethatcher



36" Snowblower



Pictured: S18 with a 42" (107 cm) collection deck.

### **Model S Standard Features**

- Precision steering and handling
- Forward Speed Control
- Grass Handling System® (GHS)
- 7 bushel (8.7 cu. ft.) grass catcher
- High capacity, commercial engine air filtration
- Hydro-Gear ZT3100 transmissions
- Tilt-up decks and tilt-open body
- Flexible deck-carrier frame
- 12.75" (32.38 cm) Thru-Shaft® PTO GHS blower
- Oscillating PowerFil® chute with Grass-Pak® full signal

### **Model S Popular Add-ons**

- Power Dump
- LED Headlights
- Adjustable Footrests
- Dethatcher
- 48" (122 cm) Dozer Blade
- 36" (92 cm) Single-Stage Snowblower
- Spyker® Spreader and Mount
- Comfort Seat with optional Armrests


See more details at: walker.com/model-s










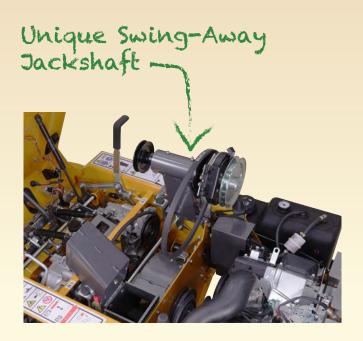

Gives unobstructed access to GHS blower and other components

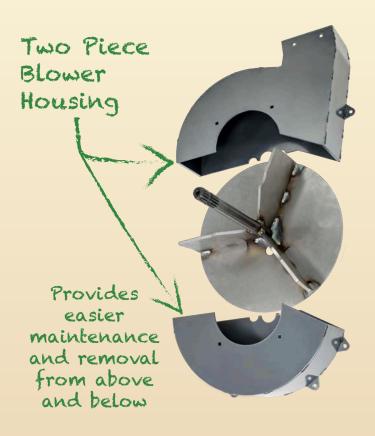

### **Fast**

This well-balanced mower with a powerful 13.25" thru-shaft GHS blower, and Hydro-Gear ZT3100 transaxles can mow and collect grass at speeds up to 8 MPH.



### Quiet

The new design of the Model C23i features in-line power delivery utilizing a swing-away jackshaft and electric PTO clutch, eliminating the need for a PTO gearbox, making quieter operation.

### **Easy Maintenance**

The simplified body and chassis design of the Model C23i has less belts and pulleys, less bearings, no gearboxes, and a reduced parts count. In addition to an easier tilt-open seat panel, the two-piece GHS blower housing design allows for easier maintenance and repairs.





# **Affordable**

With 25% fewer overall total machine components, and 64% less individual chassis parts compared to the Model T, the Model C23i provides excellent performance at a lower price.

See more details at: walker.com/models/c23i





# Model $\mathbb{C}_{19}$

- 19 HP Kohler Command Pro CH620 engine
- 7 bushel (8.7 cu. ft.) or 10.0 bushel (12.4 cu. ft.) grass catcher option
- 4 gallon (15.1 liter) fuel tank
- Eaton Model 7 transmissions with ductile cast iron gearbox final drives
- Transmission Oil Performance System (TOPS)<sup>TM</sup>
- Deck/Kit options: Collection 36"-48" (91 cm-122 cm), Mulching 36"-52" (91 cm-132 cm),
   Discharge 36"-60" (91 cm-152 cm)

# Model $\mathbb{C}_{19i}$

- 19 HP Kohler Command Pro ECH630 EFI engine
- 4 gallon (15.1 liter) fuel tank
- Fuel efficiency, startability, and performance
- Eaton Model 7 transmissions with ductile cast iron gearbox final drives
- Transmission Oil Performance System (TOPS)<sup>TM</sup>
- Deck/Kit options: Collection 36"-52" (91 cm-132 cm), Mulching 36"-52" (91 cm-132 cm),
   Discharge 36"-60" (91 cm-152 cm)

# Model $\mathbb{C}$ 23i

- 23 HP Kohler Command Pro ECH730 EFI engine
- 7 bushel (8.7 cu. ft.) or 10.0 bushel (12.4 cu. ft.) grass catcher option
- 4.7 gal (17.8 liter) fuel tank
- Deck/Kit options: Collection 42-52" (107 cm-132 cm), Mulching 42-52" (107 cm-132 cm), Discharge 42-60" (107 cm-152 cm)

### **Model C Standard Features**

- Precision Steering and Handling
- Forward Speed Control
- Grass Handling System® (GHS)
- 7 bushel (8.7 cu. ft.) grass catcher
- Kohler PRO 300-Hour Extended Life Oil and Filter
- Well balanced for superior hillside stability

# **Model C Popular Add-ons**

- LED Headlights
- Dethatcher
- Operator Soft Cab (C19, C19i)
- Implement Hitch with electric ram lift
- 42" (107 cm) Two-Stage Snowblower
- Comfort Seat (standard on C23i)
- Power Dump
- 48" (122 cm) Dozer Blade






See more details at: walker.com/model-c









# Model T

The Model T is the standard for what commercial operators expect from a lawn mower. Intended specifically for commercial use, every aspect of the Model T has been designed to meet the most demanding expectations of operators who want fast and easy mowing with beautiful results. It is the go-to Walker for commercial operations and a favorite among discerning customers.

The go-to collection mower for power and versatility



# Model **723**

- 23 HP Kohler Command Pro CH680 engine
- Commercial mower with carbureted engine
- Comfort Seat with optional armrests
- Non-collection version is available
- Deck/Kit options: Collection 36"-52" (91 cm-132 cm), Mulching 36"-52" (91 cm-132 cm),
   Discharge 36"-74" (91 cm-188 cm)


# Model $\mathbb{Z}_{27i}$

- 26.5 HP Kohler Command Pro ECH749 EFI engine
- Superior fuel efficiency
- Comfort Seat with optional armrests
- Non-collection version is available
- Deck/Kit options: Collection 36"-52" (91 cm-132 cm), Mulching 36"-52" (91 cm-132 cm),
   Discharge 36"-74" (91 cm-188 cm)



# Hi-Dump®





### **Model T Standard Features**

- Precision steering and handling
- Forward Speed Control
- Grass Handling System® (GHS)
- 10 bushel (12.4 cu. ft.) grass catcher
- Commercial air filter with remote air intake and turbine pre-cleaner
- Eaton Model 7 transmissions with ductile cast iron gearbox final drives
- Flexible deck-carrier frame
- Tilt-up deck and tilt-open body
- 4.7 gallon (17.8 liter) fuel tank
- 10.5" (27 cm) GHS blower
- Transmission Oil Performance System (TOPS)<sup>TM</sup>
- Kohler PRO 300-Hour Extended Life Oil and Filter

# **Model T Popular Add-ons**

- Hi-Dump® grass catcher system raises 67"
   (171 cm) with automatic catcher door actuation
- Power Dump
- LED headlights
- Dethatcher
- Implement Hitch with electric ram lift
- 42" (107 cm) Two-Stage Snowblower
- 48" (122 cm) Dozer Blade
- Spyker® Spreader and Mount

See more details at: walker.com/model-t







The Model D is an industrialgrade Walker Mower with
impressive power and agility.
The Model D is the only dieselpowered Walker Mower
equipped with the Walker Grass
Handling System® (GHS). The
Model D effortlessly handles the
harshest mowing environments
and extended running times
without compromising
efficiency or power.

Dieselpowered,
versatile,
commercial
collection
mower



# Model $\mathbb{D}$ 21d

- 20.9 HP three cylinder Kubota D722 diesel engine
- 10 bushel (12.4 cu. ft.) grass catcher
- Deck/Kit options: Collection 36"-52" (91 cm-132 cm), Mulching 36"-52" (91 cm-132 cm),
   Discharge 36"-74" (91 cm-188 cm)



Operator Soft Cab and 42" Snowblower

See more details at: walker.com/model-d



### **Model D Standard Features**

- Precision steering and handling
- Forward Speed Control
- Grass Handling System® (GHS)
- Automatic glow plug preheat
- Transverse engine mount
- Liquid-cooled with self-cleaning radiator
- Impressive 34 ft-lb torque
- High-capacity, commercial air filter with remote air intake and turbine pre-cleaner
- Eaton Model 7 transmissions with ductile cast iron gearbox final drives
- Grammer four-way adjustable Suspension Seat
- Tilt-up deck and tilt-open body
- Flexible deck-carrier frame
- High output 40-amp charging system
- 10.5" (27 cm) GHS blower
- Oscillating PowerFil® chute with Grass-Pak® full signal
- Transmission Oil Performance System (TOPS)™

## **Model D Popular Add-ons**


- Hi-Dump® grass catcher system raises 67" (171 cm) with automatic catcher door actuation
- Power Dump
- LED Headlights
- Dethatcher
- Operator Soft Cab
- Implement Hitch with electric ram lift
- 42" (107 cm) Two-Stage Snowblower
- 48" (122 cm) Dozer Blade







Pictured: D21d with a 52" (132 cm) collection deck.

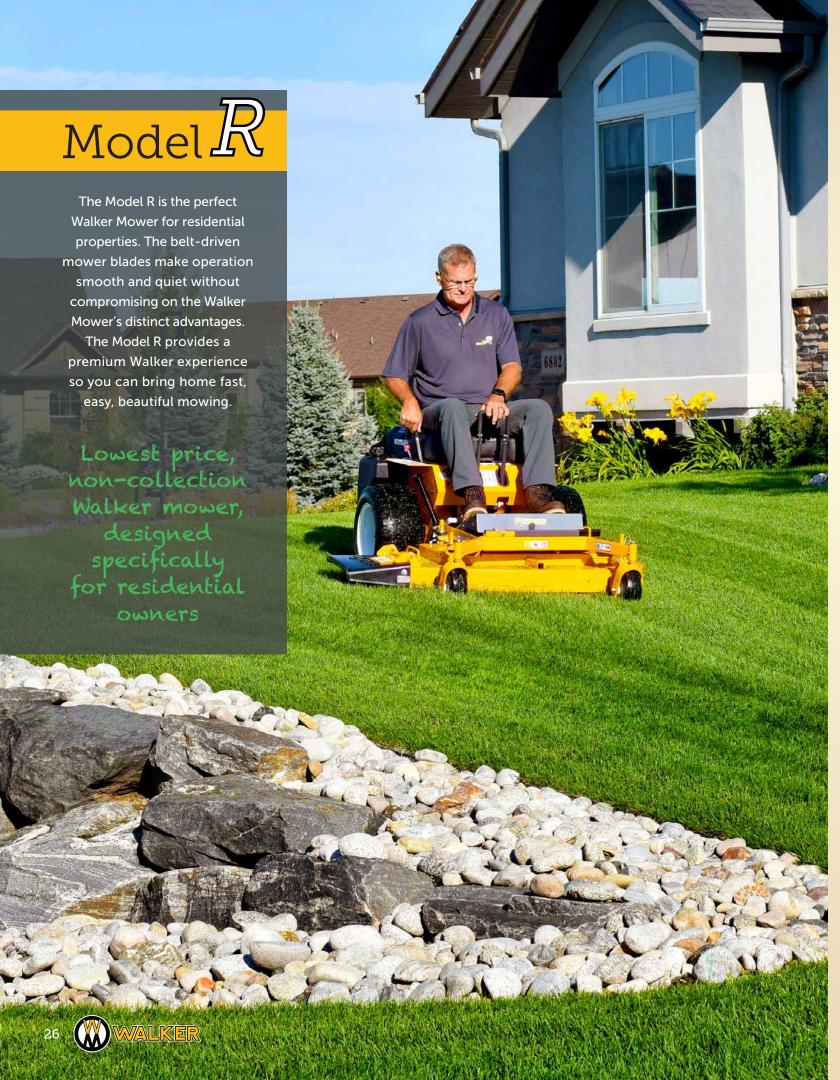

# Model $\mathbb{R}$ 21

- 42" (107 cm), 48" (122 cm), or 54" (137 cm) side discharge deck cutting width configurations
- Belt-driven blades with dampened belttensioner for smooth, quiet operation
- Custom blade spindles with grease zerk and bleed valve
- Molded rubber side discharge deflector shield



Accelerator® grass catcher



48" Dozer Blade




The Model R features a three-year, 300-hour, caster-to-caster residential warranty. All parts and components are covered against manufacturer's defect.

### **Model R Standard Features**

- Precision Steering and Handling
- Forward Speed Control
- 21 HP Kohler KT620 with Smart-Choke® technology for easy starts in hot and cold weather
- Hydro-Gear EZT transmissions
- Ogura® electric blade clutch and brake with easy pull/push switch operation
- Tilt-up deck and tilt-open seat
- 3 gallon (11.4 liter) custom molded, low profile fuel tank with integrated fuel level gauge
- Flexible deck-carrier frame
- Two drive belts with spring-loaded tensioning idler pulleys: ground drive and blade drive
- Kohler PRO 300-Hour Extended Life Oil and Filter

### Model R Popular Add-ons


- Comfort Seat
- Tow Hitch
- Mulching Kit including bolt-in baffles and serrated mulching blades
- Accelerator® 3.3 bushel (4.2 cu. ft.) side-mount grass catcher
- LED light kit
- 48" (122 cm) Dozer Blade



See more details at: walker.com/model-r











# Model $B_{23}$

- 22.5 HP Kohler Command Pro CH680 engine
- Commercial mower with carbureted engine
- Integrated Ogura® electric clutch with Soft Start
- Comfort Seat with optional armrests
- 4.7 gallon (17.8 liter) fuel tank
- Deck/Kit options: Mulching 36"-52" (91 cm-132 cm), Discharge 36"-74" (91 cm-188 cm)

# Model B27i

- 26.5 HP Kohler Command Pro ECH749
   EFI engine
- Superior fuel efficiency and economy
- Integrated Ogura® electric clutch with Soft Start
- Comfort Seat with optional armrests
- 4.7 gallon (17.8 liter) fuel tank
- Deck/Kit options: Mulching 36"-52" (91 cm-132 cm), Discharge 36"-74" (91 cm-188 cm)

# See more details at: walker.com/model-b



### **Model B Standard Features**

- Precision steering and handling
- Forward Speed Control
- High-capacity, commercial engine air filtration
- Hydro-Gear ZT3100 transmissions
- 8 MPH (13 km/h) maximum ground speed
- Flexible deck-carrier frame
- Tilt-up deck and tilt-open body
- Kohler PRO 300-Hour Extended Life Oil and Filter

# **Model B Popular Add-ons**

- Utility Bed
- 36" (92 cm) Single-Stage Snowblower
- Spyker® Spreader and Mount •
- 48" (122 cm) Dozer Blade
- LED Headlights
- Suspension Seat
- Big Tire Kit
- Tow Hitch
- Dethatcher
- Implement Hitch
- Accelerator® 3.3 bushel (4.2 cu. ft.) side-mount grass catcher



Spyker® Spreader









The Walker Model H
stands alone in its class for
high production mowing
and improved return on
investment. When fast,
beautiful results are demanded
on vastly different properties,
turf types, and conditions, the
Model H delivers for the most
discerning operators. A variety of
attachments and add-ons keep
the Model H productive yearround with excellent results.

High production versatile discharge or mulching, commercial mower



# Model **1124d**

- 23.7 HP Kohler KDW1003 diesel engine
- Rubber isolation engine mounts
- Liquid cooled with self-cleaning radiator
- Standard ROPS and Utility Bed

# Model #27i

- 26.5 HP Kohler Command Pro ECH749 EFI engine
- Kohler PRO 300-Hour Extended Life Oil and Filter
- Superior fuel efficiency
- Lightest weight Model H, minimizing turf rutting

# Model 🗐 38i

- 38 HP Kohler Command Pro ECH980 EFI engine
- Increased displacement and torque
- Cyclonic high-capacity air filter



Operator Hard Cab, Implement Hitch, and 60" Rotary Broom



### **Model H Standard Features**

- Precision Steering and Handling
- Forward Speed Control
- Grammer 4-way adjustable Suspension Seat
- High capacity, commercial engine air filtration
- Hydro-Gear ZT3400 transmissions
- 3 Model H-specific mowing decks with integrated
   Deck Height Adjuster and Adjustable Foot Rest
- Flexible deck-carrier frame
- Tilt-up deck and tilt-open body
- 9.4 gallon (35.6 liter) fuel capacity, dual tanks
- Deck/Kit options: Mulching 48"-61" (122 cm-155 cm), Discharge 48"-74" (122 cm-188 cm)

### **Model H Popular Add-ons**

- Power Tilt-Up® deck lift
- LED Headlights
- Deck arm adapter kit, allowing compatibility with six additional Walker mowing decks
- Implement Hitch with electric ram lift
- Operator Hard Cab
- 50" (127 cm) Two-Stage Snowblower
- 60" (152 cm) Rotary Broom
- 60" (152 cm) Dozer Blade

See more details at: walker.com/model-h






# **Deck/Kit Compatibility**

### Models

| Decks/Kits | S | С | Т | D | R | В | Н        |
|------------|---|---|---|---|---|---|----------|
| Collection |   |   |   |   |   |   |          |
| C36R       | • | * | • | • |   |   |          |
| C42/R      | • | • | • | • |   |   |          |
| C48        |   | • | • | • |   |   |          |
| C48R       | • | • | • | • |   |   |          |
| C52R       |   | • | • | • |   |   |          |
| Discharge  |   |   |   |   |   |   |          |
| S36        | • | * | • | • |   | • |          |
| <b>S42</b> | • | • | • | • |   | • |          |
| \$42-R     |   |   |   |   | • |   |          |
| S48-R      |   |   |   |   | • |   |          |
| S48        | • | • | • | • |   | • | <b>A</b> |
| <b>S52</b> |   | • | • | • |   | • | <b>A</b> |
| R52        |   |   |   |   |   |   | •        |
| S54-R      |   |   |   |   | • |   |          |
| <b>S56</b> | • | • | • | • |   | • | <b>A</b> |
| , S60      |   | X |   |   |   | • |          |
| S61        |   |   |   |   |   |   | •        |
| R64        |   |   |   |   |   |   | •        |
| <b>S74</b> |   | X | • | • |   | • | <b>A</b> |
| Mulching   |   |   |   |   |   |   |          |
| M36        | • | * | • | • |   | • |          |
| M42        | • | • | • | • |   | • |          |
| M42B       | • | • | • | • |   | • |          |
| S42-R Kit  |   |   |   |   | • |   |          |
| S48-R Kit  |   |   |   |   | • |   |          |
| M48        | • | • | • | • |   | • | <b>A</b> |
| M52        |   | X | • | • |   | • | <b>A</b> |
| S52 Kit    |   | • | • | • |   | • | <b>A</b> |
| S61 Kit    |   |   |   |   |   |   | •        |
| Multi-Deck |   |   |   |   |   |   |          |
| U48        | • | • | • | • |   |   |          |



<sup>★</sup> C19 and C19i only. X C23i only.

# Collection



# Discharge



# Mulching



# Multi-Deck



# **Add-ons: Compatiblity**

| Models                       | S | С        | Т | D | R | В | Н |
|------------------------------|---|----------|---|---|---|---|---|
| Implements                   |   |          |   |   |   |   |   |
| Implement Hitch <sup>1</sup> |   | •        | • | • |   | • | • |
| 47" Rotary Broom             |   | •        | • | • |   | • |   |
| 60" Rotary Broom             |   |          |   |   |   |   | • |
| 48" Dozer Blade              |   | •        | • | • |   | • | • |
| 60" Dozer Blade              |   |          | • | • |   |   | • |
| Loader Bucket                |   |          | • | • |   |   |   |
| Debris Blower                |   | •        | • | • |   | • |   |
| 42" Two-Stage Snowblower     |   | •        | • | • |   | • |   |
| 50" Two-Stage Snowblower     |   |          |   |   |   |   | • |
| Attachments                  |   |          |   |   |   |   |   |
| Operator Soft Cab            |   | <b>A</b> | • | • |   | • |   |
| Operator Hard Cab            |   |          |   |   |   |   | • |
| ROPS                         |   | <b>A</b> | • | • |   |   | • |
| 36" Single-Stage Snowblower  | • | <b>A</b> | • | • |   | • |   |
| Dethatcher <sup>2</sup>      | • | •        | • | • |   | • |   |
| Boom Sprayer <sup>2</sup>    | • | •        | • | • |   | • | • |
| 48" Dozer Blade              | • | •        | • | • | • | • |   |
| Spyker® Spreader and Mount   | • | •        | • | • |   | • |   |
| Options                      |   |          |   |   |   |   |   |
| Comfort Seat                 | • | •        | • | • | • | • |   |
| Suspension Seat              |   | <b>A</b> | • | • |   | • | • |
| Armrests                     | • | •        | • | • | • | • | • |
| Utility Bed                  |   |          | • | • |   | • |   |
| Headlights                   | • | <b>A</b> | • | • | • | • | • |
| Cup Holder                   | • | •        | • | • |   | • | • |
| Instrument Panel Cover       |   |          | • | • |   |   |   |
| Tail Weights                 |   | <b>A</b> | • | • |   | • | • |
| Power Dump                   | • | •        | • | • |   |   |   |

<sup>•</sup> Compatible. ▲ Compatible with Models C19, and C19i only, not C23i.

¹ Required for use of compatible implements. ² Visit walker.com for a full list of compatible decks.



|                                   | Models          | S | С        | Т | D | R | В | Н |
|-----------------------------------|-----------------|---|----------|---|---|---|---|---|
| Options (continued)               |                 |   |          |   |   |   |   |   |
| Hi-Dump <sup>®</sup>              |                 |   |          | • | • |   |   |   |
| Large Hole Screen                 |                 | • | •        | • | • |   |   |   |
| No-Catch Deflector                |                 | • | •        | • | • |   |   |   |
| GHS Blower Lockout                |                 |   | <b>A</b> | • | • |   |   |   |
| Dump Bag                          |                 | • | •        | • | • |   |   |   |
| Dump Bins                         |                 |   | X        | • | • |   |   |   |
| Deck Height Adjuster <sup>2</sup> |                 | • | •        | • | • |   | • | • |
| Deck Height Washers <sup>2</sup>  |                 | • | •        | • | • |   | • | • |
| Curb Jumper <sup>2</sup>          |                 | • | •        | • | • |   | • | • |
| Power Tilt-Up®                    |                 |   |          |   |   |   |   | • |
| Breakaway Blades <sup>2</sup>     |                 | • | •        | • | • |   | • |   |
| Adjustable Footrests <sup>2</sup> |                 | • | •        | • | • |   | • | • |
| Deck Cuff <sup>2</sup>            |                 | • | •        | • | • |   |   |   |
| Spread Axle Tail Wheel            |                 |   | <b>A</b> | • | • |   |   |   |
| Dual Tail Wheel                   |                 |   | X        | • | • |   |   |   |
| Single Wide Tail Wheel            |                 |   | X        | • | • |   |   |   |
| Tail Wheel Lock                   |                 |   |          | • | • |   |   |   |
| 18 x 7-8 Turf Tire                |                 | • | <b>A</b> | • | • |   | • |   |
| 18 x 8.5-10 Turf Tire             |                 | • | •        | • | • | • | • |   |
| 18 x 9.5-8 Turf Tire              |                 | • | •        | • | • |   | • |   |
| 18 x 10.5-10 Turf Tire            |                 |   | •        | • | • | • | • |   |
| 18 x 7-8 Directional AT Ti        | re              | • | <b>A</b> | • | • |   | • |   |
| 18 x 8.5-10 AT Tire               |                 | • | •        | • | • | • | • |   |
| 18 x 11-10 AT Tire                |                 |   | •        | • | • | • | • |   |
| 23 x 10.5-12 AT Tire              |                 |   |          |   |   |   |   | • |
| 23 x 10.5-12 Directional AT       | Tire            |   |          |   |   |   |   | • |
| Semi-Pneumatic Deck Ti            | re <sup>2</sup> | • | •        | • | • |   | • |   |
| Pneumatic Deck Tire <sup>2</sup>  |                 | • | •        | • | • |   | • |   |
| Tire Chains <sup>3</sup>          |                 | • | •        | • | • | • | • | • |

<sup>•</sup> Compatible. <sup>2</sup> Visit walker.com for a full list of compatible decks. <sup>3</sup> Visit walker.com for a full list of compatible tires. ▲ Compatible with Models C19, and C19i only, not C23i. **X** Compatible with Model C23i only.

# Walker Mower Specifications

|  | S18               | C19               | C19i              | C23i              | T23             | T27i             | D21d           | R21                      | B23               | B27i              | H24d                       | H27i              | H38i              |
|--|-------------------|-------------------|-------------------|-------------------|-----------------|------------------|----------------|--------------------------|-------------------|-------------------|----------------------------|-------------------|-------------------|
| Engine   | B&S<br>Vanguard   | Kohler<br>CH620   | Kohler<br>ECH630  | Kohler<br>ECH730  | Kohler<br>CH680 | Kohler<br>ECH749 | Kubota<br>D722 | Kohler<br>KT620          | Kohler<br>CH680   | Kohler<br>ECH749  | Kohler<br>KDW1003          | Kohler<br>ECH749  | Kohler<br>ECH980  |
| Fuel System  | Carb              | Carb              | EFI               | 뛴                 | Carb            | 图                | Diesel         | Carb                     | Carb              | 뙤                 | Diesel                     | E                 | 盟                 |
| Cooling System   | Air               | Air               | Air               | Air               | Air             | Air              | Liquid         | Air                      | Air               | Air               | Liquid                     | Air               | Air               |
| Displacement, cc   | 570               | 674               | 694               | 747               | 674             | 747              | 719            | 660                      | 674               | 747               | 1028                       | 747               | 999               |
| HР @ 3600 RPM  | 18                | 19                | 19                | 23                | 22.5            | 26.5             | 20.9           | 21                       | 22.5              | 26.5              | 23.7                       | 26.5              | 38                |
| Max Torque, ft-lbs   | 29.2              | 35                | 34.2              | 38.1              | 36.8            | 40               | 34             | 35.9                     | 36.8              | 40                | 36.8                       | 40                | 53                |
| Fuel Capacity, US gal (liter)  | 4<br>(15.1)       | 4<br>(15.1)       | 4<br>(15.1)       | 4.7<br>(17.8)     | 4.7<br>(17.8)   | 4.7<br>(17.8)    | 4.7<br>(17.8)  | 3<br>(11.4)              | 4.7 gal<br>(17.8) | 4.7<br>(17.8)     | 9.4<br>(35.6)              | 9.4<br>(35.6)     | 9.4<br>(35.6)     |
| Drive Tire Size, diameter x width  | 18×8.5            | 18×8.5            | 18x8.5            | 18×8.5            | 18x9.5          | 18×9.5           | 18×9.5         | 18×8.5                   | 18×8.5            | 18×8.5            | 23x10.5                    | 23×10.5           | 23×10.5           |
| Top Speed, MPH (km/h)  | 7.4<br>(12)       | 6.5<br>(10.5)     | 6.5<br>(10.5)     | 8 (13)            | 6.5<br>(10.5)   | 6.5<br>(10.5)    | 6.5<br>(10.5)  | 6.5<br>(11.3)            | 8 (13)            | 8 (13)            | 10 (16)                    | 10<br>(16)        | 10<br>(16)        |
| Tractor + Deck¹ Length inch (cm)   | 89.25<br>(226.69) | 89.25<br>(226.69) | 89.25<br>(226.69) | 96.25<br>(244.47) | 93<br>(236.22)  | 93<br>(236.22)   | 93<br>(236.22) | 93 <sup>1</sup> (236.22) | 90.75 (230)       | 90.75<br>(230.50) | 107<br>(271.78)            | 107<br>(271.78)   | 108<br>(274.32)   |
| Tractor + Deck <sup>1</sup> Tilted Length inch (cm)  | 77<br>(195.58)    | 77<br>(195.58)    | 77<br>(195.58)    | 77<br>(195.58)    | 77<br>(195.58)  | 77<br>(195.58)   | 77<br>(195.58) | 77<br>(195.58)           | 72<br>(183)       | 72<br>(182.88)    | 87.75<br>(222.88)          | 87.75<br>(222.88) | 87.75<br>(222.88) |
| Height, inch (cm)  | 46.5<br>(118.11)  | 47.5<br>(120.65)  | 47.5<br>(120.65)  | 50<br>(127)       | 50<br>(127)     | 50<br>(127)      | 50<br>(127)    | 42<br>(106.68)           | 39.5<br>(100)     | 39.5<br>(100.33)  | 50.5 <sup>3</sup> (128.27) | 46.5<br>(118.11)  | 46.5<br>(118.11)  |
| Tractor Only Width, inch (cm)  | 38.5<br>(98)      | 37.75<br>(95.88)  | 37.75<br>(95.88)  | 41<br>(104.14)    | 39<br>(99.06)   | 39<br>(99.06)    | 39<br>(99.06)  | 39<br>(99.06)            | 38.5<br>(98)      | 38.5<br>(97.79)   | 46.5<br>(118.11)           | 46.5<br>(118.11)  | 46.5<br>(118.11)  |
| Tractor Only Weight, lb (kg)   | 675<br>(306)      | 734<br>(333)      | 739<br>(335)      | 780<br>(354)      | 790<br>(358)    | 787<br>(357)     | 959<br>(435)   | 404<br>(183)             | 610<br>(277)      | 610<br>(277)      | 997<br>(452)               | 748<br>(340)      | 802<br>(364)      |
| Tractor + Deck² Weight, lb (kg)  | 866<br>(393)      | 925<br>(420)      | 930<br>(422)      | 999<br>(453)      | 1009<br>(458)   | 1006<br>(457)    | 1178<br>(534)  | 575<br>(260)             | 848<br>(385)      | 848<br>(385)      | 1434<br>(650)              | 1185<br>(537)     | 1239<br>(562)     |
| 10 010 mg 010; 043 037; Hand D. 049 D. 049 D. 049 C. 056 010 mg 010; 043 037; Hand D. 049 D. 43" D. 049 C. 050 C. 064 3DODG folded Note: The 431 C. 05mm Vit | , o D. C , o      | 7. 24.40          | 001 00. 07.       |                   |                 | 7. T             | 7.             | A)" D. CAO               | T D A 3D          |                   | No. +0.                    | 21 - :            | 17:F              |

weighs 175 lbs (79 kg) 'S, C19, and C19i: C42. C23i, T and D: C48. R: S48. B: M48. H: R64. 2S: C36, C19 and C19i: C42, C23i, T and D: C48, R: 42" B: S48, H: R64. 3ROPS folded. Note: The A21 Hi-Dump Kit

# Standard Features

- Gasoline engines require unleaded
  87+ octane
- Diesel engines require 2-D
- Full pressure lube systems with filter
- Heavy-duty stamped steel cutting blades, tempered
- Flywheel alternator charging, D21d has belt-driven alternator

- Internal mechanical parking brake
- Safety circuitry provided by safety switches: Seat, transmission neutral blade clutch, and parking brake
- Electric blade clutch with easy pull/push switch operation on Models R, B, S and C23i
- Dual-lever steering, precision frictionlock Forward Speed Control lever with neutral/park position
- All machines feature dual, independent hydrostatic transmissions
- Cutting height 1.5" to 4", 1.5" to 4.5" or 1" to 5", varies per model
- Welded, heavy gauge, steel chassis
- Decks and add-ons powered by splined PTO shaft with dual u-joints allowing dynamic articulation, except for the Model R
- Deck carrier frame with flexible deck suspension, caster wheels and counterweight springs
- Welded, 14 gauge steel bodies
- Welded, 11 gauge steel decks
- 12V electrical systems
- Blade clutch and brake with manual belt tightener C19, C19i, T, D, H